

# 10.2

## 10.2 PREMIUM VIDEO INTERCOM SYSTEM



## 10.2 Premium Video Intercom System


### DOOR STATION

- Zinc Alloy, surface mount
- 1/4 inch colour CCD camera
- Resolution: 420TV Lines
- 4-wire twisted pair connection
- Waterproof Vandal Resistant alloy housing
- Built-in automatic 3 x LED lighting for night vision
- 68 degree wide angle field of view
- Minimum illumination 1.0 lux
- Compatible with Four Plus & 10.2 intercom systems
- Dimensions: 98 (W) x 173 (H) x 25 (D)
- Part No. 100-958

### ROOM STATION

- Slimline surface mounted Monitor/Room Station
- 10 inch colour LCD display
- Touch sensitive glass buttons
- Supports up to two video Door Stations and up to two video Room Stations
- Make intercom calls between two Room Stations
- Transfer door calls between Room Stations
- Monitor up to two optional CCTV cameras or other video input
- Do Not Disturb function
- Electric door lock release from Room Stations
- Adjustable Colour/Contrast/Brightness/Ring Volume
- Choice of 12 door bell chimes
- Master/Slave selectable
- Dimensions: 334 (W) x 210 (H) x 25 (D)
- Part No. 100-974

## System Configuration

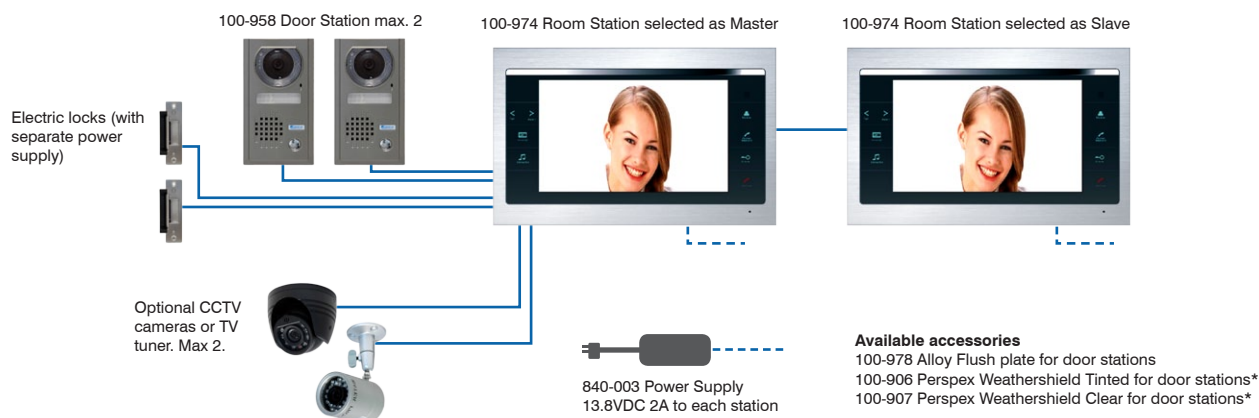

Door station/s to Room Station/s minimum wiring requirements: 4 core screened cable (100-960) + RG59 coax, star wired to master. In some installations the 100-958 Video Door Station may have audio feedback when used with a weathershield. A simple modification to the microphone gain is available - please ask when ordering.

Available from:

**iCentral**<sup>™</sup>  
Intelligent Central Systems  
A DIVISION OF **NESS** CORPORATION

[www.icentralsystems.com.au](http://www.icentralsystems.com.au)